

Automotive Window Films




Hot Look Outside, Cool & Private Inside

Offering Performance & Value With No Signal Interference



FX Premium delivers outstanding performance at an affordable price. No metal technology ensures no signal interference with wireless devices.

3M™ FX Premium Automotive Window Films

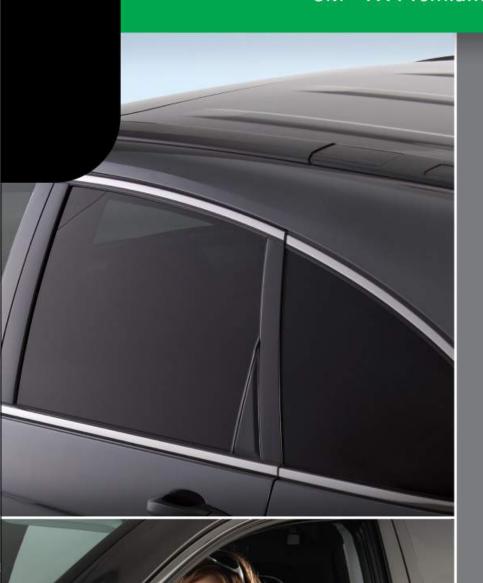

Reduces Heat: Up to 45% TSER



Non-metallized No Signal Interference



Blocks 99% UV Rays Up to SPF 1000 Protects Interior & Skin



Reduces Glare



Lifetime Warranty



Premium Dyed Film Technology Provides Stylish Look Combined with a Lifetime Warranty from 3M









FX-PN 35

FX-PM 55

3M™FX Premium Automotive Window Films

The 3M Difference

Improving comfort, protecting vehicle interiors and the hallmark of 3M Automotive Window films, 3M invented window films in 1966 and our innovative window film products have provided protection from the sun's 3M to work for you.

There are thousands of country, but only a select few have been chosen to be part of the 3M network. Our 3M Authorized Dealers are available to help solve problems such as excessive heat and glare in your vehicle.

Stay Cool ||||

3M's FX Premium Automotive Window Film incorporates a unique process that allows for high heat rejection, low reflectivity and protection from the sun's heat and ultraviolet rays. FX Premium rejects up to 45% of the total solar energy coming through your windows, providing a 'cool effect' in more ways than one.

Stay Connected

3M FX Premium Automotive Window Films are non-metallized. The result is an easy-to-maintain, long-life film that won't interfere with mobile phone, GPS and satellite radio reception. This eliminates the frustration of lost connectivity associated with metallic or hybrid window films.

Superior UV Protection

Blocking 99 percent of UV light, 3M Crystalline Automotive Window Films provide a total Sun Protection Factor (SPF) of up to 1000. This provides vehicle occupants with significant protection from the dangers of the sun's UV rays, including sunburn, causes of premature aging, and the risk of more serious skin conditions.

Reduces Glare 💥

3M FX Premium Automotive Window Films reduce up to 93% of the glare caused by blinding sunlight, allowing you to see better and concentrate more on driving. FX Premium films are available in a variety of tint levels to meet your needs, allowing 5% to 55% of the visible light into your vehicle.

Limited Lifetime Warranty




Selecting 3M Automotive Window Films gives you peace of mind. That's because we have one of the most comprehensive warranties you can get. 3M FX Premium Automotive Window Films are backed by a limited lifetime warranty should your window film need replacing from bubbling, peeling, blistering or purpling. 3M Automotive Window Films are

durable, designed to last and virtually maintenance free. Our films are sold and installed exclusively by


professional, Authorized 3M Dealers.






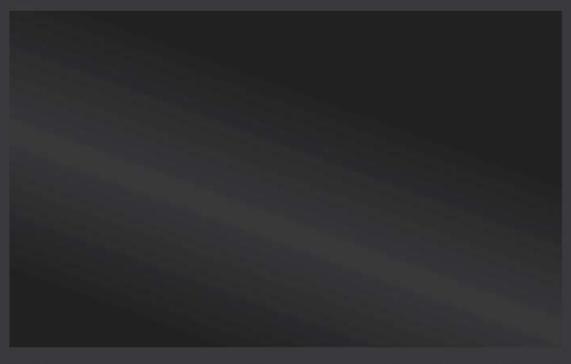

3M FX Premium Automotive Window Films 45% TSER FX-PM 5

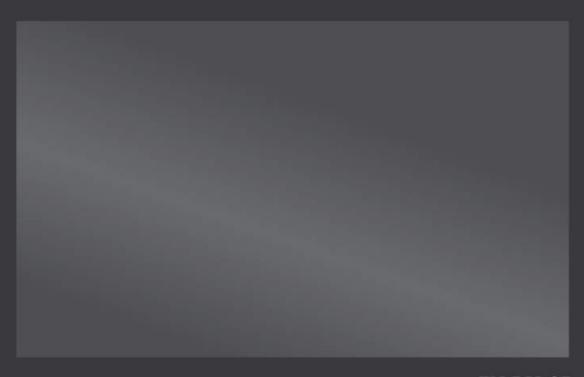



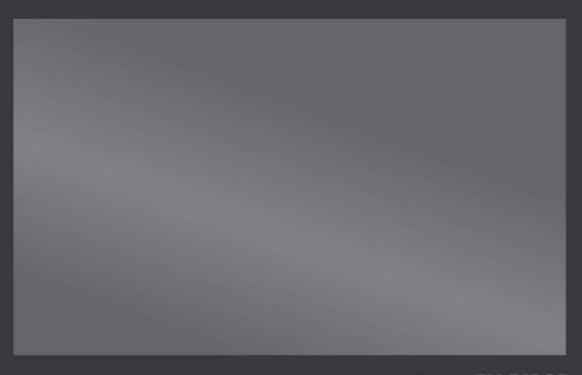

41% TSER FX-PM 25







37% TSER FX-PM 35



3M™ FX Premium Automotive Window Films

| FX-PM 5 FX Premit | um 5 6% | UV Rejection | 45% TSER |
|---|------------------|---------------------------------|--------------|
| Total Solar Energy Rejected Visible Light Reflected | 10.000 | Glare Reduction | |
| FX-PM 15 FX Prem | ium 15 | 31 | 43% TSER |
| Visible Light Transmitted Total Solar Energy Rejected Visible Light Reflected | 17% 43% 5% | UV Rejection Glare Reduction | 99.9% 81% |
| FX-PM 25 FX Prem | nium 25 | X | 41% TSER |
| Visible Light Transmitted Total Solar Energy Rejected Visible Light Reflected | 26% 41% 5% | UV Rejection Glare Reduction | 99.9% 71% |
| FX-PM 30 FX Prem | nium 30 | 2 | 38% TSER |
| Visible Light Transmitted Total Solar Energy Rejected Visible Light Reflected | 35% 38% 5% | UV Rejection Glare Reduction | 99.9% 61% |
| FX-PM 35 FX Prem | nium 35 | 2 | 37% TSER |
| Visible Light Transmitted Total Solar Energy Rejected Visible Light Reflected | 41% 37% 6% | UV Rejection Glare Reduction | 99.9% 54% |
| FX-PM 55 FX Prem | nium 55 | 2 | 32% TSER |
| Visible Light Transmitted Total Solar Energy Rejected Visible Light Reflected | 58% 32% 7% | UV Rejection Glare Reduction | 99.9% 34% |

TSER (Total Solar Energy Rejected)

visible light transmitted

The percentage of visible light that passes directly through filmed glass: the higher the number, the lighter the film.

total solar energy rejected

The percentage of total solar energy rejected by filmed glass. The higher this value, the less solar heat energy is transmitted by the glass.

visible light reflection

The percentage of visible light reflected back from the glass.

uv rejection

The percentage of ultraviolet light that is rejected by filmed glass. Ultraviolet light contributes sunburn and other harmful skin conditions from the sun and to the fading and deterioration of fabrics and leather.

glare reduction

The percentage by which visible light is reduced by the addition of film.



3M Automotive Window Films

Another Great 3M Product You Can Trust

















^{*} Performance data generated using applicable industry test methods and

Put the innovation of 3M to work for you

3M invented window films and no one has more experience. In 1966, we received the first patent for window films. Today there are millions of square feet of 3M Window Films installed all around the world. Put your trust in 3M Window Films, a name you know for quality products and services. We never stop creating new window film products and solutions that make your car more comfortable.





www.3M.com/windowfilm

3M Renewable Energy Division

3M Center, Building 235-2S-27 St Paul MN 55144-1000



@ 3M 2010

Filtrete, Nexcare, Scotchgard, Scotch-Brite and 3M are trademarks of 3M Company. Scotch and Post-it are registered trademarks of 3M Company. Used under license by 3M subsidiaries and affiliates.

NOTE: The law on auto tint varies by state or province. Please check your state or province laws or ask your dealer for films approved for use on vehicles.

Printed in U.S.A. 98-0150-0111-2